


## Stehle Product Information

# 3588 DP Jointing Cutterhead

The Stehle DP Jointing Cutterhead is the new low-weight and low-noise alternative to a brazed diamond jointing cutter. The Stehle DP Jointing Cutterhead is configured for users with high quality demands and focus on resource-saving (energy and material consumption).



The Stehle 3588 DP Jointing Cutterhead: The noise reduction of up to 3 dB makes working more comfortable.

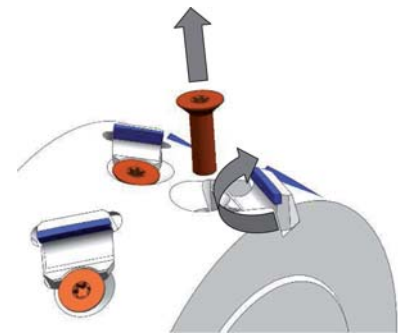

The body of the Stehle DP Jointing Cutterhead is reusable. Damaged cutting edges can be exchanged individually.

### Machine / Application

- edge banding machines
- for jump-milling units for the jointing of melamine-, paper-, HPL-laminated, foiled and veneered panels

### Design

- low-weight aluminum body
- shear angle 35°
- resharpening area 1.5 mm
- Cutting edge design can be symmetrical or asymmetrical
- DP cutterhead system with exchangeable DP segments incl. gullet

### Advantages

- less unbalance
- noise reduction of up to 3 dB (A)
- excellent cutting quality thanks to large shear angle
- re-usable body
- wear-resistant exchangeable steel gullet



Particularly suitable for:  
OSB, laminated particle board, MDF,  
wood fiber boards, HDF, WPC, lightweight  
panels, composite materials

Ø D [mm]	B [mm]	b [mm]	Ø d [mm]	Z [mm]	DKN [mm]	Design	Machine	Order-No. [L]	Order-No. [R]
100	43,5	40,6	30	3+3	8x3,3	asymmetrical	Brandt	50811691	50811690
100	43,5	25	30	3+3	8x3,3	asymmetrical	HOLZ-HER, SCM	50811693	50811692
100	63	25	30	3+3	8x3,3	asymmetrical	HOLZ-HER, SCM	50811695	50811694
100	65	40,6	30	3+3	8x3,3	asymmetrical	Brandt	50811697	50811696
125	43,5	40	30	3+3	8x3,3	asymmetrical	Homag	50811698	50811698
125	63	40	30	3+3	8x3,3	asymmetrical	Homag	50811699	50811699

Contact  
Stehle

T +49 (0) 7451 / 93 222  
F +49 (0) 7451 / 93 444

Date 5/2014

info@stehle-int.com  
www.stehle-int.com